

NF2000A-SUM Series (RoHS认证产品)

单相 250VAC

螺丝脱落防止功能
DIN导轨对应(选项)



UL1283/CSA C22.2 No8(C-UL) (file No.E102708)
EN60939-2 (file No.R50366085)


用途

开关电源、通用逆变器、半导体制造装置、机床、工业机器人、医疗电子设备、CVCF等的电源装置、电梯电源、工厂电源等



规格

Part No.	Rated Current	Weight	
NF2010A-SUM	10A	150g	fig.1
NF2020A-SUM	20A	150g	
Rated Voltage	250VAC		
Leakage Current	0.6mA max 250VAC 60Hz By UL1283		
Ambient temp.	-25 up to 55 Deg.C		


fig.1

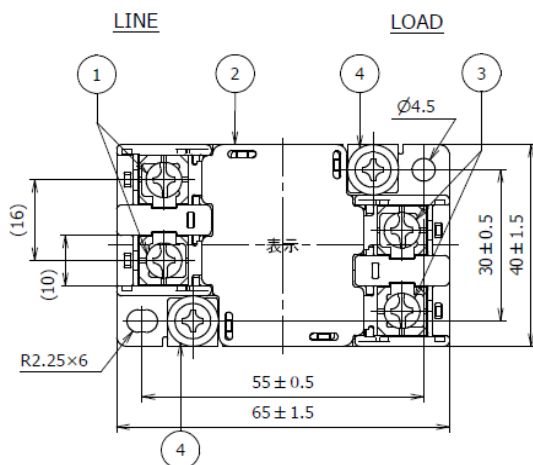


No	名称 Part name	仕様 Specification	備考 Note
1	入力端子 Input terminal	M4	ねじ脱落防止構造 保証締付トルク:1.2N·m
2	ケース Case		
3	出力端子 Output terminal	M4	ねじ脱落防止構造 保証締付トルク:1.2N·m
4	アース端子 Earth terminal	M4	保証締付トルク:1.6N·m




表示例
Example of Markings

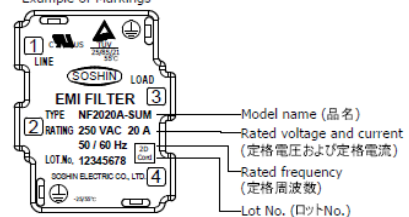

代表特性 (10A)

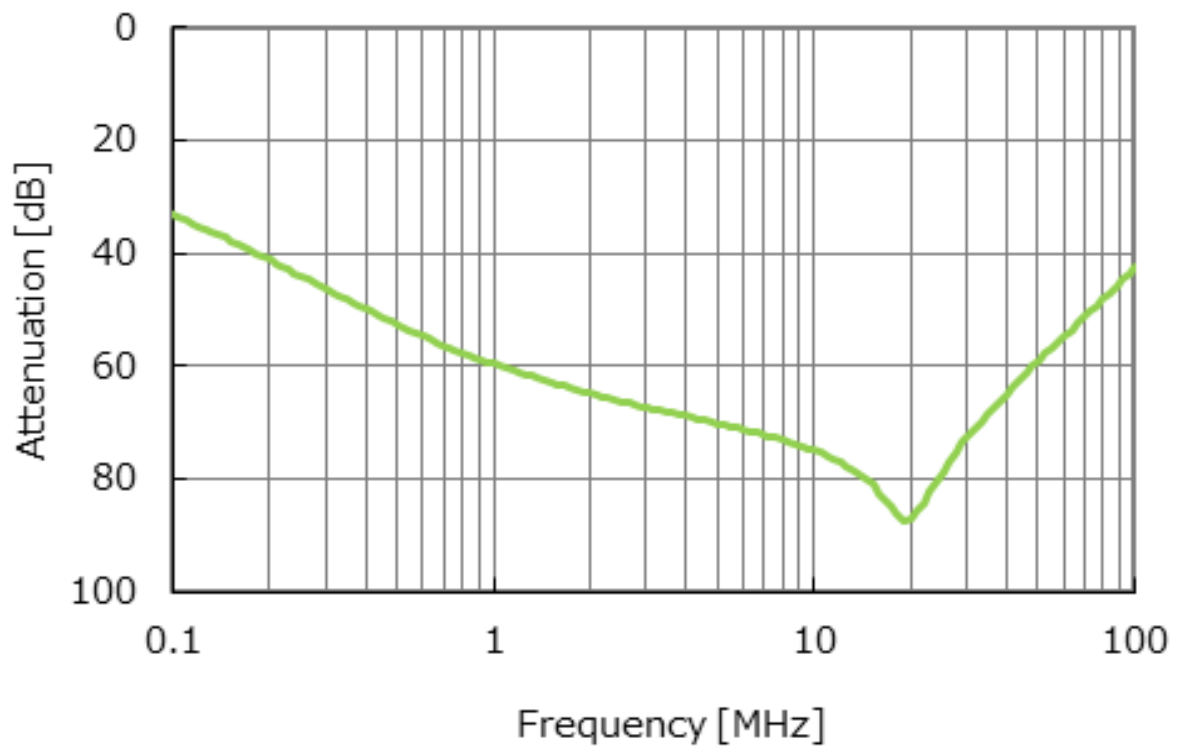

代表特性 (20A)

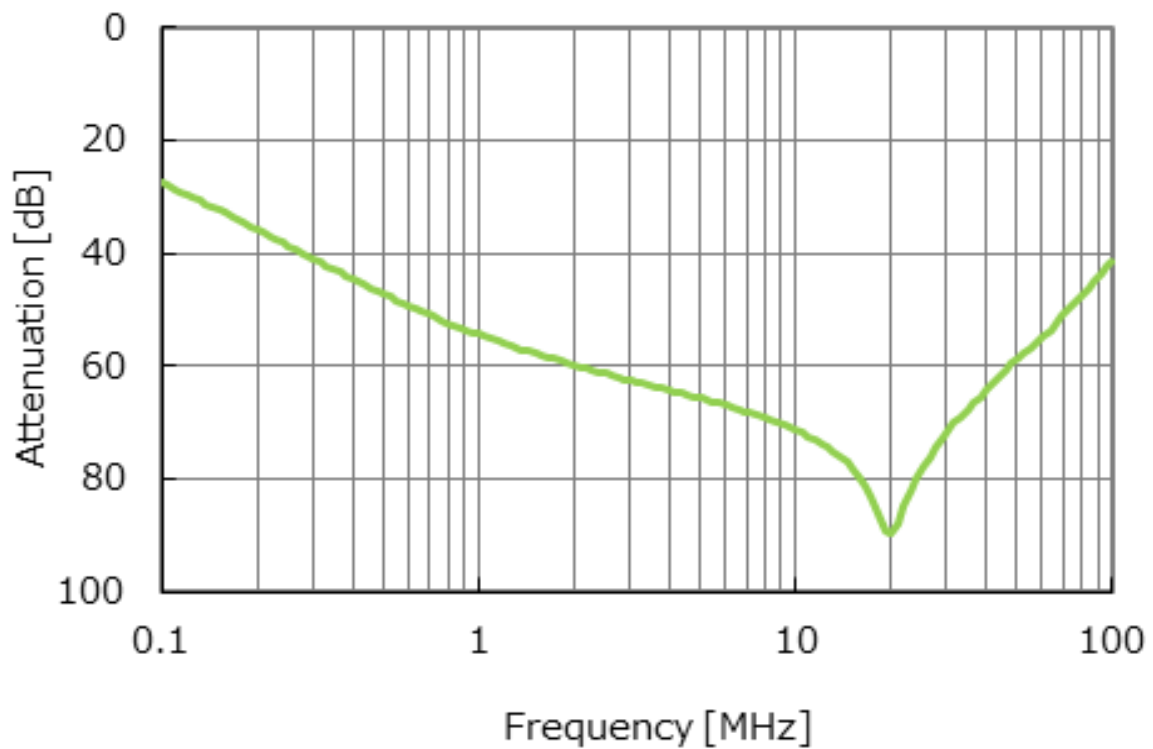

回路图

